World Leader •In-Rack• Audio & Video Monitoring

WOHLER AMP2A-10S

January 27, 2004

Premium Quality, Analog Self-Powered Speaker System - 10 Stereo Channels

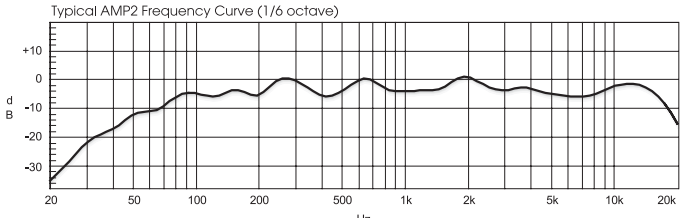

Features:

Premium Quality Drivers for Superior Reproduction

20 Balanced Analog Inputs (10 Stereo, Select 1)

Balanced Analog Output of Selected Stereo Source

Powerful 104dB SPL at 2 feet (0.6m)

Two 20 Segment Tri-Color Level Meters Displaying VU or PPM

Excellent Frequency Response and Low Distortion

Focused Sound, Reduces Adjacent Bay Crosstalk

Audible Indication of Phase/Polarity Problems

Innovative LED Display of Phase/Polarity Relationships

Thorough Magnetic Shielding for Placement next to Video Monitors

Compact & Convenient, all this Power in only 2U of rack space

Headphone Jack, Mutes Speakers

Blowout Proof Speakers

Quick and Simple Installation

The AMP2A-10S provides self-powered, full-fidelity stereo audio monitoring in a compact two rackspace cabinet. A front panel switch allows the operator to select one stereo source for monitoring & output from up to 10 stereo analog inputs (20 channels). The AMP2A-10S features two 20 segment LED level meters showing VU or PPM for accurate level-metering. This unit contains three audiophile-quality drivers and three power amplifiers; two speakers and amplifiers reproduce midrange and high frequency information in stereo, while the third amp/driver combination handles summed LF information below the 500 Hz crossover point.

The unique design provides optimally focused sound for operators in an Ultra Near Field (1 to 3 ft.) working environment and offers performance comparable to that of many separate monitor pairs, yet does so without the installation hassles, awkward speaker placements and "added-on" look. This provides for a higher SPL for the operator while reducing overall ambient sound and adjacent bay crosstalk.

Excellent HF response reveals potential problems with audio whine or hiss and electronic rather than acoustic cancellation of bass frequencies provides positive audible detection of out-of-phase (reversed polarity) audio feeds. A headphone jack is provided on the front panel, usage automatically mutes the speakers. The front panel features an innovative LED Display of Phase/Polarity Relationships. Output limiter circuits are incorporated to protect the speakers, and extensive magnetic shielding allows placement immediately adjacent to video monitors with no color impurities.

The AMP2A-10S is ideally suited for use in VTR bays, mobile production vehicles, teleconferencing installations, multimedia systems, satellite link and cable TV facilities, and on-air radio studios. Built and rigorously, tested in the USA, the AMP2A-10S is backed by a strong warranty and a "Satisfaction Guaranteed" return policy.

Wohler

Audio Monitoring | Level Metering | Alarm Systems | Video Monitoring

Toll Free (US): 1.888.5.WOHLER • Tel: 510.870.0810 • Fax: 510.870.0811 • 31055 Huntwood Avenue, Hayward, California 94544, USA

www.wohler.com sales@wohler.com

WOHLER AMP2A-10S

Premium Quality, Analog Self-Powered Speaker System - 10 Stereo Channels

Rear Panel:

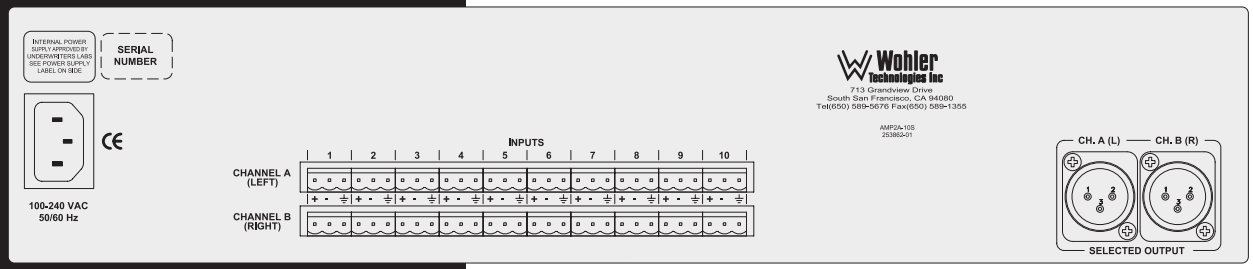

System Diagram:

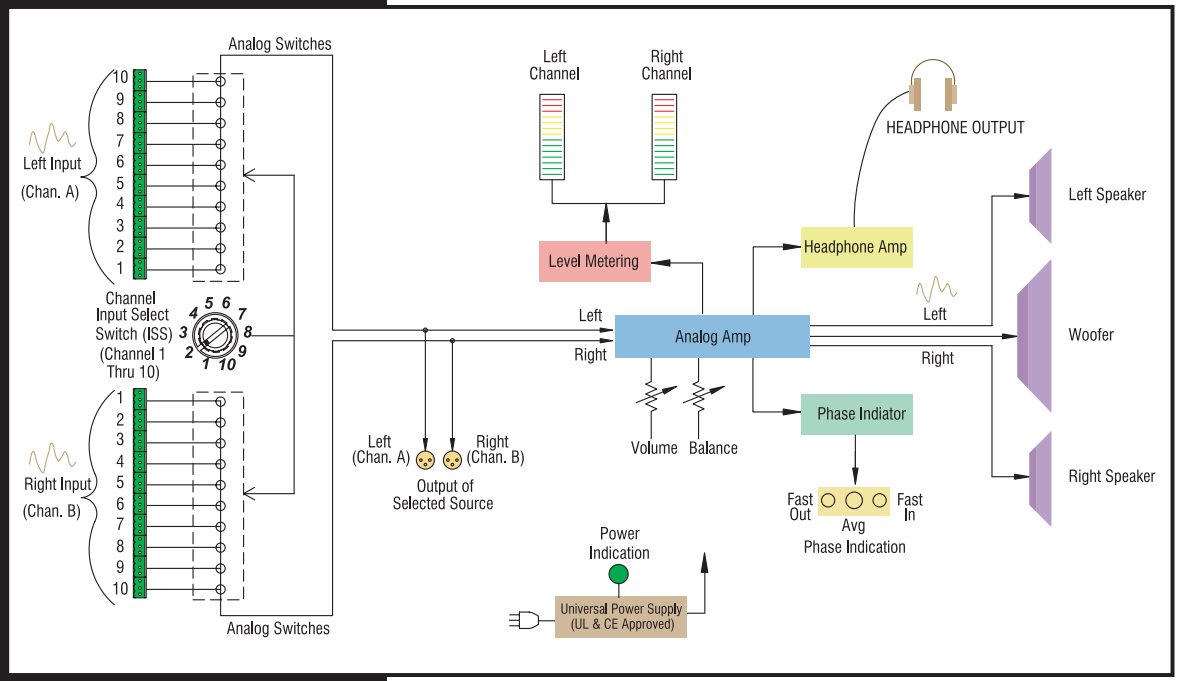

Specifications:

Input	10 stereo balanced analog - phoenix terminals
Output	balanced analog output of selected pair - XLR
Level meters	2 x 20 segment bargraphs
Level meter scale	+6 to -40 dB
Level meter threshold	-6, 0, +4, +8 dBv: DIP switch selectable
Level meter dynamics	VU or PPM: DIP switch selectable
Midscale resolution	1 dB
Analog input impedance	>40 kOhms balanced
Peak acoustic output @ 2 feet	104dB SPL
Frequency response (1/6 octave)	80Hz - 16kHz (±5dB) (-10dB @ 40Hz, 20kHz)
Power output	RMS each side (4 Ohms) - 10W, 14W peak RMS center WOOFER (4 Ohms) - 25W, 35W peak
Electrical distortion	<0.15% at any level below limit threshold
Acoustic distortion	6% or less worst case frequencies above 120Hz including cabinet resonance, typically < 1.5%
Hum and noise	better than -68dB below full output
Magnetic shielding	<0.8 gauss any adjacent surface
Power consumption (AVG. MAX.)	45W
Dimensions (HxWxD)	3.5 x 19 x 12" (89 x 483 x 305mm)
Weight (approx.)	18lbs (8.2kg)
Power supply	100 to 240VAC, 50/60Hz universal input CE and UL approved

All specifications are subject to improvement

Toll Free (US): 1.888.5.WOHLER • Tel: 510. 870.0810 • Fax: 510.870.0811
31055 Huntwood Avenue, Hayward, California 94544, USA
www.wohler.com • sales@wohler.com